


JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



4X6X14L

Series HSC-S

Base Mounted - Double Suction Centrifugal Pumps

SPECIFICATIONS



FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

- ☒ Cast Iron Bronze Fitted
- ☒ Fabricated Heavy Duty Baseplate
- ☒ ANSI/OSHA Coupling Guard
- ☒ Flexible Coupling
- ☐ Spacer Coupling (Optional)
- ☐ Galvanized Drip Pan (Optional)

TYPE OF SEAL

- ☐ **STANDARD:** 175 PSIG (12 Bar) working pressure, 125# ANSI Flange Configuration
- ☐ **STANDARD:** Crane Type 21, BUNA/Carbon Ceramic, 75 psig (5 Bar) maximum suction pressure, from -20° to 225°F (-29 °C to 107 °C).
- ☐ **OPTIONAL:** Crane Type 21, EPR/Carbon Ceramic, 75 psig (5 Bar) maximum suction pressure, from -20° to 250°F (-29 °C to 121 °C).
- ☐ **OPTIONAL:** Crane Type 21, EPR/Carbon Tungsten Carbide, 75 psig (5 Bar) maximum suction pressure, from -20° to 250°F (-29 °C to 121 °C).
- ☐ **OPTIONAL:** 280 PSIG (19 Bar) working pressure, 250# ANSI Flange Configuration
- ☐ **STANDARD:** Crane Type 1, BUNA/Carbon-Ceramic, 150 psig (10 Bar) maximum suction pressure, from -20° to 225°F (-29 °C to 107 °C).
- ☐ **OPTIONAL:** 400 PSIG (27 Bar) working pressure, 250# ANSI Flange Configuration
- ☐ **STANDARD:** Crane Type 1B, BUNA/Carbon-Ceramic, 300 psig (20 Bar) maximum suction pressure, from -20° to 225°F (-29 °C to 107 °C).
- ☐ **OTHER:**

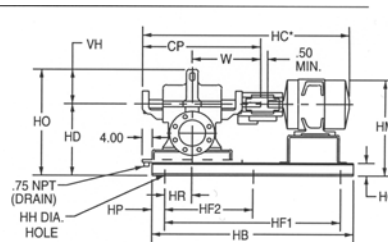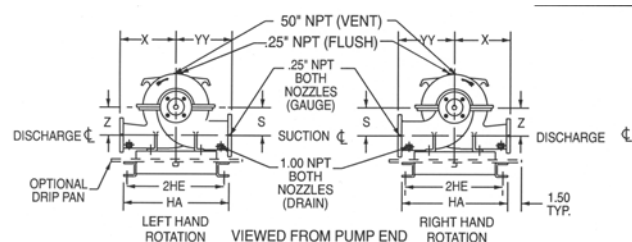

FLANGE DIMENSIONS INCHES	
Discharge	Suction
4	6

DIMENSIONS - Inches (mm)

MOTOR FRAME	HA	HB	2HE	HF ₁	HF ₂	HG	HH	HP	HR	CP	HC*	HD	HM*	HO	S & Z	VH	W	X	YY
182	24 (610)	50 (1270)	22 (559)	38 (965)	19 (483)	4 (102)	1 (25)	6 (152)	3.25 (83)	30.75 (781)	46 (1168)	19.25 (489)	25 (635)	29 (737)	7.75 (197)	9.62 (244)	17.5 (444)	11.5 (292)	13 (330)
184	24 (610)	50 (1270)	22 (559)	38 (965)	19 (483)	4 (102)	1 (25)	6 (152)	3.25 (83)	30.75 (781)	47 (1194)	19.25 (489)	25 (635)	29 (737)	7.75 (197)	9.62 (244)	17.5 (444)	11.5 (292)	13 (330)
213	24 (610)	50 (1270)	22 (559)	38 (965)	19 (483)	4 (102)	1 (25)	6 (152)	3.25 (83)	30.75 (781)	49 (1245)	19.25 (489)	25 (635)	29 (737)	7.75 (197)	9.62 (244)	17.5 (444)	11.5 (292)	13 (330)
215	24 (610)	50 (1270)	22 (559)	38 (965)	19 (483)	4 (102)	1 (25)	6 (152)	3.25 (83)	30.75 (781)	51 (1295)	19.25 (489)	25 (635)	29 (737)	7.75 (197)	9.62 (244)	17.5 (444)	11.5 (292)	13 (330)
254	24 (610)	50 (1270)	22 (559)	38 (965)	19 (483)	4 (102)	1 (25)	6 (152)	3.25 (83)	30.75 (781)	53 (1346)	19.25 (489)	26 (660)	29 (737)	7.75 (197)	9.62 (244)	17.5 (444)	11.5 (292)	13 (330)
256	24 (610)	50 (1270)	22 (559)	38 (965)	19 (483)	4 (102)	1 (25)	6 (152)	3.25 (83)	30.75 (781)	55 (1397)	19.25 (489)	26 (660)	29 (737)	7.75 (197)	9.62 (244)	17.5 (444)	11.5 (292)	13 (330)
284	24 (610)	58 (1473)	22 (559)	46 (1168)	23 (584)	4 (102)	1 (25)	6 (152)	3.25 (83)	30.75 (781)	56 (1422)	19.25 (489)	27 (686)	29 (737)	7.75 (197)	9.62 (244)	17.5 (444)	11.5 (292)	13 (330)
286	24 (610)	58 (1473)	22 (559)	46 (1168)	23 (584)	4 (102)	1 (25)	6 (152)	3.25 (83)	30.75 (781)	58 (1473)	19.25 (489)	27 (686)	29 (737)	7.75 (197)	9.62 (244)	17.5 (444)	11.5 (292)	13 (330)
324	24 (610)	58 (1473)	22 (559)	46 (1168)	23 (584)	4 (102)	1 (25)	6 (152)	3.25 (83)	30.75 (781)	59 (1499)	19.25 (489)	28 (711)	29 (737)	7.75 (197)	9.62 (244)	17.5 (444)	11.5 (292)	13 (330)
326	24 (610)	58 (1473)	22 (559)	46 (1168)	23 (584)	4 (102)	1 (25)	6 (152)	3.25 (83)	30.75 (781)	61 (1549)	19.25 (489)	28 (711)	29 (737)	7.75 (197)	9.62 (244)	17.5 (444)	11.5 (292)	13 (330)
364	24 (610)	58 (1473)	22 (559)	46 (1168)	23 (584)	4 (102)	1 (25)	6 (152)	3.25 (83)	30.75 (781)	63 (1600)	19.25 (489)	28 (711)	29 (737)	7.75 (197)	9.62 (244)	17.5 (444)	11.5 (292)	13 (330)
365	24 (610)	58 (1473)	22 (559)	46 (1168)	23 (584)	4 (102)	1 (25)	6 (152)	3.25 (83)	30.75 (781)	64 (1626)	19.25 (489)	28 (711)	29 (737)	7.75 (197)	9.62 (244)	17.5 (444)	11.5 (292)	13 (330)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.xyleminc.com/brands/bellgossett

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2012 Xylem Inc.