



Conductivity sensor for wastewater

WIDE MEASURING RANGE, TEMPERATURE COMPENSATED




a xylem brand

Smooth operation, precise results

Advantages

- Very wide measuring range from 10 $\mu\text{S}/\text{cm}$... 500 mS/cm
- Highest linearity and very insensitive against contamination by 4-electrode system
- Rapid temperature compensation by integrated temperature sensor

The proven measuring technique guarantees an interference-free operation. The 4-electrode measuring cell is very insensitive to contamination. Based on a pressure resistance of up to 10 bars, there is nothing to stop you from pipe mounting.

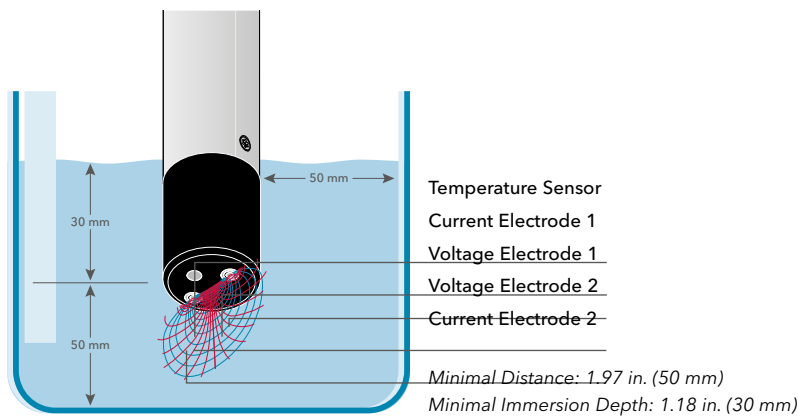

top left: TetraCon® 700 IQ;
top right: seawater model TetraCon® 700 IQ SW

left: voltage and current field of the TetraCon® 4-electrode design with two separate electrode pairs

Technical Data

Model	TetraCon® 700 IQ (SW)	
Measuring principle	Electrochemical	
Measuring range	Conductivity	10 $\mu\text{S}/\text{cm}$... 500 mS/cm
	Salinity	0 ... 70
Cell constant	K = 0.917 cm^{-1} , $\pm 1.5\%$ (in free solution) K = 0.933 cm^{-1} , with flow fitting EBST 700-DU/N	
Response time at 25 °C	t_{90} : 180 s	
Temperature measurement	Integrated NTC, -5 ... +60 °C	
Operational temperature	0 ... 60 °C	
Permissible overpressure	10 bar	

For further technical data please see datasheet D2.04.



for Systems
2020 and
282/284

www.iq-sensor.net

Ordering Information

Model	Description	Order No.
TetraCon® 700 IQ	Digital 4 electrode cond. measuring cell for highly contaminated wastewater (order cable separately)	302500
TetraCon® 700 IQ SW	Like TetraCon® 700 IQ, but as a sea water model	302501



Xylem Analytics Germany Sales GmbH & Co. KG, WTW · Am Achalaich 11 · 82362 Weilheim · Germany
Phone: +49 881 1830 · Fax: +49 881 183-420 · Info.WTW@xylem.com · www.xylemanalytics.com

All names are registered tradenames or trademarks of Xylem Inc. or one of its subsidiaries. Technical changes reserved.
© 2018 Xylem Analytics Germany Sales GmbH & Co. KG. 999251US October 2021