

Laing Thermotech Series E5 Brass AC Electronically Commutated Spherical Motor Centrifugal Pumps



Applications

Specifically designed for the following uses:

- Hot Water Circulation
- Fan Coil Heating
- Solar Heating
- Radiant Heating Systems

Specifications

Pump:

- Max Capacities: 6 GPM
- Max Head: 13'
- Pipe Connections:
1/2" FPT and 1/2" Sweat Suction and Discharge
- Maximum Working Pressure: 145 PSI
- Maximum Temperature: 203° F
- Rotation: counter clockwise when viewed from the motor end

Motor:

- Canned Spherical Motor Type
- World Voltage 100-240 Volt 50/60 Hz Cycle
- 12-28 Watts
- Automatic Overload Protection
- Low In-Rush Current

Features

Compact Design:

Close coupled, space saving design provides easy installation.

Mounting:

Pump can be mounted horizontally or vertically with motor end down.

Construction:

Wetted parts are brass, 316SS, thermoplastic, carbon and ceramic for corrosion resistance.

Ceramic Bearing Ball and Carbon Bearing Cap:

High density ceramic bearing ball and graphite impeller bearing cap designed for high efficiency and long life.

Impeller:

Highly efficient and dynamically balanced with carbon bearing for smooth ultra quiet operation.

Casing:

Casing is lead free brass construction.

Mechanical Seal:

Unique patented design has no mechanical seal which is a potential leak path.

Motor:

Highly efficient and ultra quiet spherical motor design. Pump is designed for continuous operation. All ratings are within working limits of the motor.

Electronics:

Embedded microprocessor control is self-regulating and available with variable speed dial control (potentiometer) on the pump or as an optional PWM input for OEM.

Noise level:

Whisper quiet, less than 40 db.

Weight:


Lightweight construction weighs less than 3lbs.

Laing Thermotech Series

E5 Brass Specifications

Materials of Construction (Wetted Parts)

Part	Materials
Pump Housing	Brass
"O" Ring	EPDM or Viton
Impeller	Polyphenylene Oxide (PPO)
Bearing	Carbon/Aluminum Ceramic
All Other Wetted Parts	316 Stainless Steel

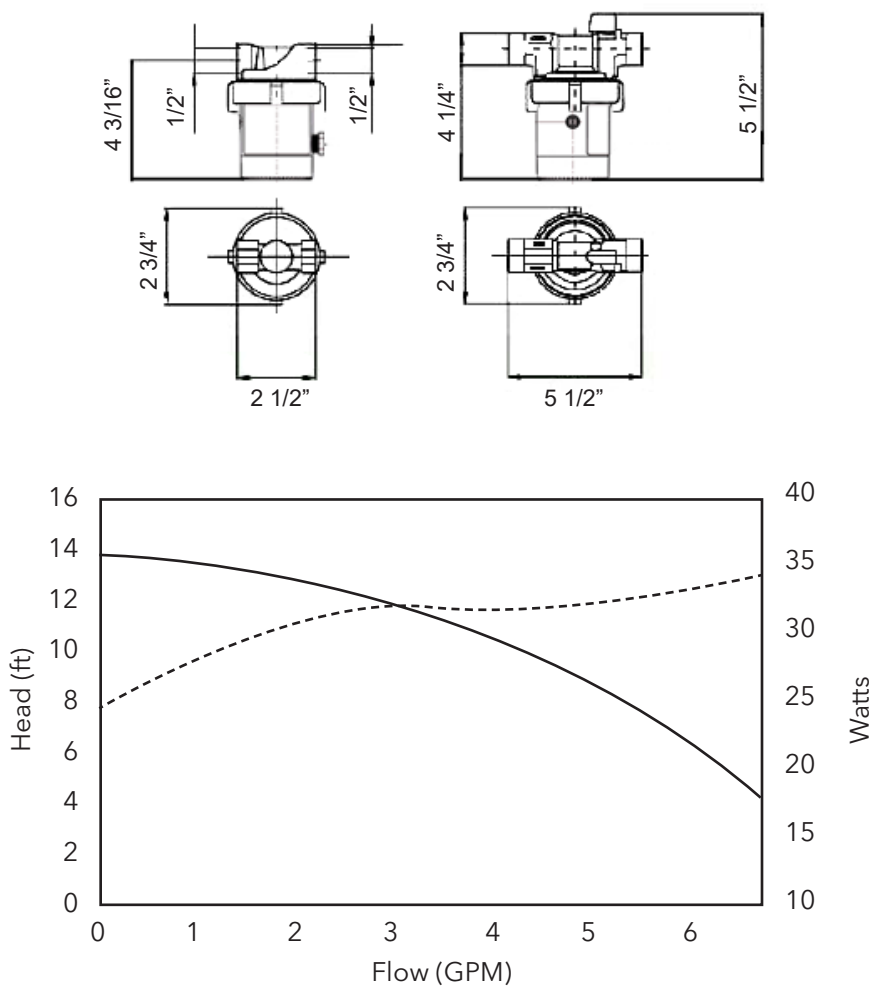

Xylem Inc.
 2881 East Bayard Street Ext., Suite A
 Seneca Falls, NY 13148
 Phone: (866) 325-4210
 Fax: (888) 322-5877
www.xylem.com/goulds

Xylem and Laing Thermotech are trademarks of Xylem Inc. or one of its subsidiaries. Goulds is a registered trademark of ITT Manufacturing Enterprises LLC and is used under license. All other trademarks or registered trademarks are property of their respective owners.

© 2023 Xylem Inc. SS-04 R3 November 2023

Learn more about
 Laing thermotech series

